


23, 9, 11

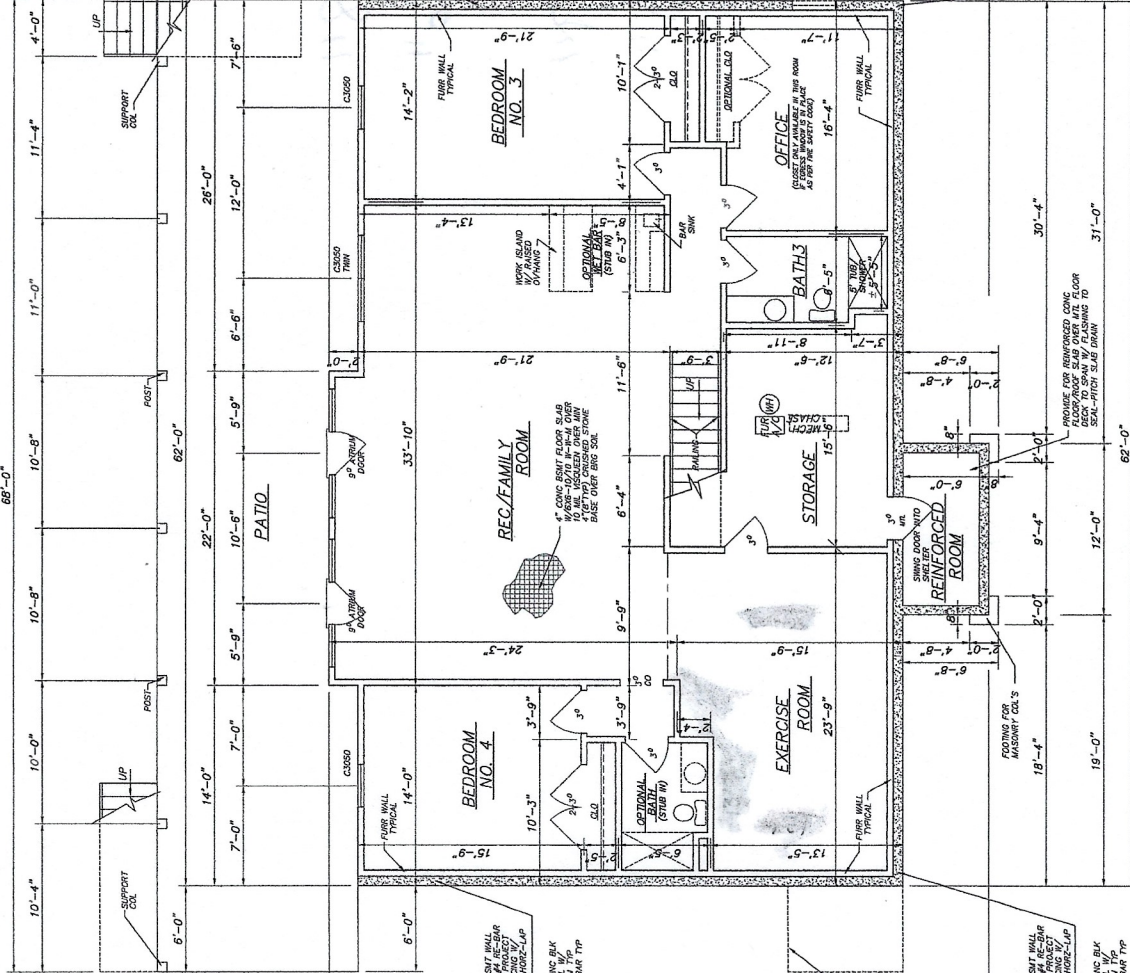

PROVIDE TERMITES TREATMENT PERIMETER EXTERIOR
AFTER FINAL BACKFILL PLACEMENT & FINISH GRADING

WINDOW KEY CASEMENT	GENERIC
NOTE: WINDOW SIZE GIVEN EXAMPLE: 02450-EQUATES TO 2'-4" x 5'-0"	
NOTE: TRACTOR TO VERIFY WINDOWS ROUGH ORG W/ WINDOWS PURCHASED BEFORE FRAMING	
NOTE: ALL OPERABLE WINDOWS 6" MIN. GRADE SURFACE TO FINISHED INTERIOR FLOOR ARE LESS THAN 24" FROM LMT CONTROL DEVICE AS PER CODE 8312.2	
NOTE: CASEMENTS SHOWN TO OPEN ADD ON FOR BRICK LEDGE	

DIMENSIONS SHOWN TO FND/FRAME LINE
100 ON FOR QUICK LEDES INVERE 18111818

[illegible]

FOUNDATION/
BASEMENT PLAN

VERIFY THAT ALL WINDOWS SATISFY CURRENT LOCAL BUILDING CODES INCLUDING EGRESS, VENTILATION, AND SAFETY GLAZING REQUIREMENTS. VERIFY THAT THE ROUGH OPENINGS REQUIRED BY THE CHOSEN WINDOW MANUFACTURER COORDINATE WITH AVAILABLE FRAMING AREAS.

G DRAFTING INC.

W E. POTTER	MMPA915	4
-------------	---------	---