



Williamson County Department Of
SEWAGE DISPOSAL MANAGEMENT
1320 West Main Street - Suite 411
Franklin, Tennessee 37064
Voice: 615.790.5751 FAX: 615.595.1293

PERMIT FOR CONSTRUCTION OF SUBSURFACE SEWAGE DISPOSAL SYSTEM

(Permit void three (3) years after date of issue)

Issued to: STRINGER KERRY

ID no: 17985

Gis no:

Location:

Subdivision:

Street Address: DEER RIDGE RD (EASEMENT)

Installation:

☒ New

☐ Repair

Capacities:

Septic tank: 1000

Pump tank:

Establishment: ☒ Residential ☐ Other

BDR: 3 OST: 0

GPD:

Soil Evaluation Basis: SOIL TYPING BY SOILS SCIENTIST - SOIL SURVEY


Estimated absorption rate: 45 MPI

Type of System: CONVENTIONAL

Other description:

Notes:

315 FEET OF FIELD LINE IS TO BE INSTALLED IN SEPTIC AREA AS SHOWN ON SKETCH. FIELD LINES ARE TO BE 24 INCHES DEEP, 36 INCHES WIDE, WITH 12 INCHES OF ROCK. WELL IS TO BE 50 FEET FROM ANY PART OF SEPTIC SYSTEM OR SEPTIC AREA. FIELD LINES ARE TO MAINTAIN 20 FEET FROM PROPERTY LINES AND 10 FEET FROM WATER LINES. FIELD LINES ARE TO BE 25 FEET FROM ANY PART OF THE HOUSE. THE INSTALLER MUST CONTACT THIS DEPARTMENT FOR AN ON-SITE SYSTEM LAYOUT PRIOR TO STARTING ANY INSTALLATION WORK. SEE DRAWING BELOW FOR APPROXIMATE LOCATION OF SEPTIC FIELD.

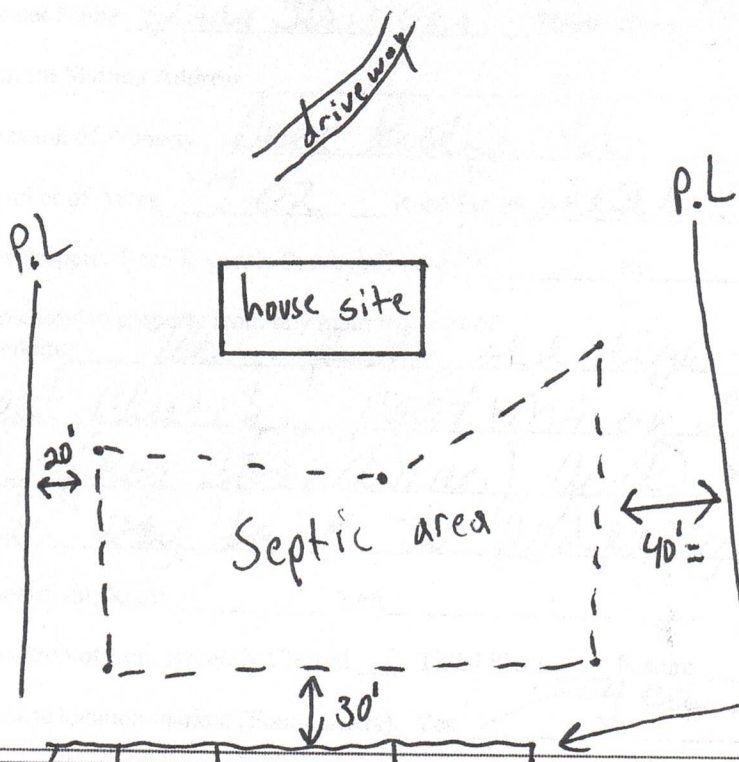

Area is fenced
as of 2-8-01

Sharp drop off

The recipient of this permit agrees to construct or have constructed the system described above in accordance with the Regulations to Govern On-Site Sewage Disposal Systems of the Williamson County Department of Sewage Disposal Management, as operated under the auspices of the Williamson County Board of Health, and T.C.A. 88-221-401 et. seq. All installers of subsurface sewage disposal systems must hold a valid annual license from the Williamson County Department of Sewage Disposal Management.

Signature [Signature]
(Signature of Recipient)

Date 4-4-01

Issued by ELLIOT ELEY

(Name)

SOILS SCIENTIST

(Title)

2/7/01

(Date)

PNR# 9436

ZC# 2001014

DEPARTMENT OF ENVIRONMENT AND CONSERVATION




DIVISION OF GROUND WATER PROTECTION

CERTIFICATE OF COMPLETION OF SUBSURFACE SEWAGE DISPOSAL SYSTEM

Issued to: Stringer, Kerry 7274
Location: Deer Ridge Rd
Fairview TN 37062

Type of system
☒ 1. Conventional
☐ 2. Low Pressure Pipe
☐ 3. Mound
☐ 4. Lagoon
☐ 5. Large Diameter Gravelless Pipe
(a) Sand backfill required Yes () No ()
☐ 6. Other
(type) 1000 (volume) _____ Septic Tank
Estimated Absorption Rate 45
(minutes per inch)
☒ New Installation () Repair () Other
Installed by: Gary Moore

Gis# 69 --- 134.07 (7.06 AC)

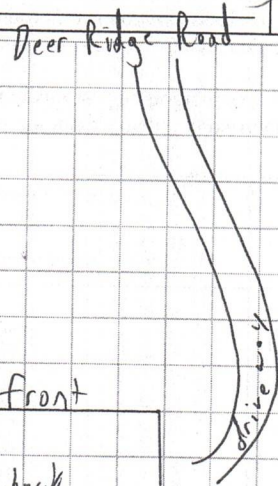

Construction Approved By: E. Blay WCDM
(Name and Title)

10-12-2001
(date)