MINNESOTA DEPARTMENT OF HEALTH

WELL AND BORING CONSTRUCTION RECORD

Minnesota Statutes, chapter 103I

MINNESOTA UNIQUE WELL AND BORING NO.: 862227

WELL OR BORING LOCATION


County Name: Goodhue

Township Name	Township No.	Range No.	Section No.	Fraction (sm. —▸ lg.)
Pine Island	109	15	29	SE SE SE

GPS LOCATION — decimal degrees (to four decimal places). Latitude 44.2109 Longitude -92.6311

House Number, Street Name, City, and ZIP Code of Well Location: 203rd Ave Pine Island 55963

Show exact location of well/boring in section grid with "X." Sketch map of well/boring location. Showing property lines, roads, buildings, and direction.

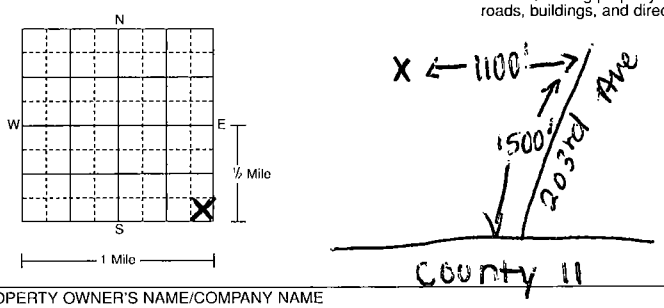

PROPERTY OWNER'S NAME/COMPANY NAME: Lue Lor

Property owner's mailing address if different than well location address indicated above.

WELL OWNER'S NAME/COMPANY NAME

Well/boring owner's mailing address if different than property owner's address indicated above.

GEOLOGICAL MATERIALS	COLOR	HARDNESS OF MATERIAL	FROM	TO
Drift	Brown	Soft	0	50
Sandstone	White	Soft	50	100
Lime	Tan	Hard	100	220
Lime	Grey	Hard	220	400
Sandstone	Grey	Hard	400	500

Use a second sheet, if needed.

REMARKS, ELEVATION, SOURCE OF DATA, etc.

RECEIVED JUL 7 2022

RECEIVED JUL 25 2022 WELL MGT.

MINN DEPT. OF HEALTH COPY 862227

WELL/BORING DEPTH (completed): 500 ft. DATE WORK COMPLETED: 6/18/22

DRILLING METHOD: ☐ Cable Tool ☐ Driven ☐ Dual Rotary ☐ Auger ☒ Rotary ☐ Rotasonic ☐ Other

DRILLING FLUID: Foam

WELL HYDROFRACTURED? ☐ Yes ☒ No From ft. To ft.

USE: ☐ Domestic ☐ Monitoring ☐ Heating/Cooling ☐ Noncommunity PWS ☒ Irrigation ☐ Industry/Commercial ☐ Community PWS ☐ Dewatering ☐ Remedial ☐ Elevator ☐

CASING MATERIAL: Drive Shoe? ☐ Yes ☒ No ☒ Steel ☐ Threaded ☒ Welded ☐ Plastic ☐

CASING Diameter	Weight	Specifications	HOLE DIAM.
4 in. To 423 ft.	10.79 lbs./ft.	A53B	12 in. To 101 ft.
8 in. To 101 ft.	lbs./ft.	A53B	8 in. To 420 ft.
in. To ft.	lbs./ft.		4 in. To 500 ft.

SCREEN Make

OPEN HOLE From 423 ft. To 500 ft.

Type Diam.

Slot/Gauze Length

Set between ft. and ft. FITTINGS

STATIC WATER LEVEL 77 ft. ☒ Below ☐ Above land surface

Date measured 5/31/22 Dry hole ☐ Yes ☒ No

PUMPING LEVEL (below land surface): 126 ft. after 2 hrs. pumping 100 g.p.m.

WELLHEAD COMPLETION: ☐ Pitless/adapter manufacturer Model ☒ Casing protection Well Seal ☒ 12 in. above grade ☐ At-grade ☐ Well House ☐ Hand Pump

GROUT INFORMATION (specify bentonite, cement-sand, neat-cement, concrete, cuttings, or other)

Material Neat Cement From 0 To 423 ft. 8 ☒ Yds. ☐ Bags

Material From To ft. ☐ Yds. ☐ Bags

Material From To ft. ☐ Yds. ☐ Bags

Driven casing seal From To Bags

One bag = 94 lbs. cement or 50 lbs. bentonite

NEAREST KNOWN SOURCE OF CONTAMINATION: None at this time

Well is feet direction from type

Well disinfected upon completion? ☐ Yes ☐ No

PUMP: ☐ Not installed Date installed 6/9/22

Manufacturer's name Schaefer

Model Number 60LD 5S4-PE HP 5 Volts 230

Length of drop pipe 168 ft. Capacity 60 g.p.m.

Type: ☒ Submersible ☐ L.S. Turbine ☐ Reciprocating ☐ Jet ☐

ABANDONED WELLS: Does property have any not in use and not sealed well(s)? ☐ Yes ☒ No

VARIANCE: Was a variance granted from the MDH for this well? ☐ Yes ☒ No TN#

WELL CONTRACTOR CERTIFICATION

This well was drilled under my supervision and in accordance with Minnesota Rules, chapter 4725. The information contained in this report is true to the best of my knowledge.

DC WELL DRILLING — Licensee Business Name — 3920 — Lic. or Reg. No.

Certified Representative Signature — 3876 — 6/20/22 — Certified Rep. No. — Date

PHILLIP DOFFING — Name of Driller

ID #52603

HE-01205-18 (Rev.3/19)